

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IL04/000707

International filing date: 02 August 2004 (02.08.2004)

Document type: Certified copy of priority document

Document details: Country/Office: IL  
Number: 161196  
Filing date: 31 March 2004 (31.03.2004)

Date of receipt at the International Bureau: 13 December 2004 (13.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1204/0707




מדינת ישראל  
STATE OF ISRAEL

Ministry of Justice  
Patent Office

משרד המשפטים  
לשכת הפטנטים

This is to certify that  
annexed hereto is a true  
copy of the documents as  
originally deposited with  
the patent application  
particulars of which are  
specified on the first page  
of the annex.

זאת לתעודה כי  
רצופים בזה העתקים  
נכונים של המסמכים  
שהופקדו לכתחילה  
עם הבקשה לפטנט  
לפי הפרטים הרשומים  
בעמוד הראשון של  
הנספח.

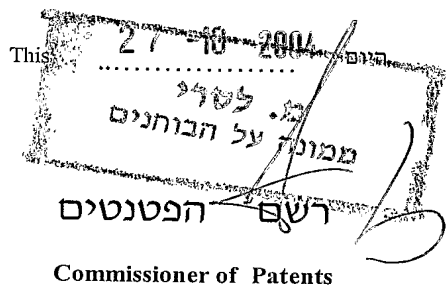

Commissioner of Patents

נתאשר  
Certified

לשימוש הלשכה  
For Office Use

**בקשה לפטנט**  
Application For Patent

<b>מספר:</b> Number	161196
<b>תאריך:</b> Date	31-03-2004
<b>הוקדם/נדחה:</b> Ante/Post-dated	

אני, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדותו)  
I, (Name and address of applicant, and in case of body corporate-place of incorporation)

נובה מכשירי מדידה בע"מ, חברה ישראלית מוויצמן פארק למדע, ת"ד 266, רחובות 76100, ישראל  
Nova Measuring Instruments Ltd., Israeli Company of Weizmann Scientific Park, P.O.B. 266, Rehovot 76100, ISRAEL

שם המצאה מכח הדין  
בעל אמצאה מכח  
Right of Law  
of an invention the title of which is

התקן מקטב ושיטת ייצורו

(בעברית)  
(Hebrew)

Polarizer device and method of its manufacture

(באנגלית)  
(English)

Hereby apply for a patent to be granted to me in respect thereof.

מבקש בזאת כי ינתן לי עליה פטנט

* בקשת חלוקה *		* בקשת פטנט מוסף *		* דרישת דין קדימה *		
Application of Division		Appl. for Patent of Addition		Priority Claim		
<b>מבקשת פטנט</b> from application	<b>מבקשה/לפטנט</b> to Patent/Appl.	<b>מספר/סימן</b> Number/Mark	<b>תאריך</b> Date	<b>מדינת האיגוד</b> Convention Country		
No. _____	No. _____	160724	04/03/2004	Israel - IL		
Dated _____	Dated _____					
P.O.A.: _____		* יפוי כח: _____				
C. 153106		המען למסירת מסמכים בישראל Address for Service in Israel				
REINHOLD COHN AND PARTNERS Patent Attorneys P.O.B. 4060, Tel-Aviv		ריינהולד כהן ושותפיו עורכי פטנטים ת"ד 4060, תל-אביב				
חתימת המבקש Signature of Applicant		שנת 2004, חודש March, יום 30 Year of This				
בשם המבקשים, ריינהולד כהן ושותפיו ע"י: _____						
		לשימוש הלשכה For Office Use				

טופס זה כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה דשומים לעיל.  
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

\* מחק את המיותר  
Delete whatever is inapplicable

התקן מקטב ושיטת ייצורו

**Polarizer device and method of its manufacture**

**Nova Measuring Instruments Ltd.**

**נובה מכשירי מדידה בע"מ**

**C. 153106**

## **POLARIZER DEVICE AND METHOD OF ITS MANUFACTURE**

### **FIELD OF THE INVENTION**

This invention relates to a polarizer device and method of its manufacture.

### **BACKGROUND OF THE INVENTION**

Polarizers are optical elements used to determine the direction of the  
5 electric field of an electromagnetic wave. Most radiation sources including all  
natural sources are unpolarized sources. If polarizer is located in the optical path  
of an unpolarized light beam, the polarizer output will mainly contain only one of  
the two linear orthogonal polarization components of the input beam, depending  
on the preferred axis of the polarizer. The ratio between the energy of the un-  
10 preferred polarization component and that of the preferred polarization  
component in the output light beam is usually valued by the polarizer's  
extinction ratio.

Polarizers are required in a large range of optical systems, including  
among others ellipsometers. Polarizers can be implemented from a variety of  
15 materials, including polymers, crystals, organic and inorganic compounds.  
Polarizers frequently used in optometry and photography are made of polymers.  
They, however, do not operate in Deep UV (DUV), which is important for  
example for spectrometric measurements.

Mostly used DUV-transmitting materials are in fact crystals. Polarizers  
20 are made of birefringent crystals. With a birefringent crystal, a light beam with a  
polarization vector parallel to the optical axis of the crystal ("Extra-Ordinary  
ray") will experience a different (usually lower) index of refraction,  $n_e$ , compared  
to that of a beam with a polarization vector perpendicular to the optical axis of  
the crystal ("Ordinary rays"),  $n_o$ .

There are several types of polarizers based on matching two prisms made of birefringent materials. The operation of some of these polarizers, including Glan-Thompson and Glan-Taylor type polarizers, is based on the principle of total internal reflection (TIR). **Figs. 1A and 1B** illustrate the configuration and operational principles of such polarizers. As shown, the polarizer is formed by two prisms  $P_1$  and  $P_2$  (typically of a rectangular triangle cross section) attached to each other by their tilted surfaces  $S_1$  and  $S_2$ , respectively. In the Glan-Thompson type polarizer, the surfaces  $S_1$  and  $S_2$  are spaced from each other by optical glue, such as "WELD-ON 3" commercially available from IPS Corporation, or NOA 61 commercially available from Norland Products Inc.

According to Snell's law of refraction, an input light beam which impinges from a first medium (prism  $P_1$ ) onto an interface between the first and second media (prisms  $P_1$  and  $P_2$ ) with an angle of incidence  $\theta_1$ , is refracted at the interface and enters the second medium (prism  $P_2$ ) with the angle of incidence  $\theta_2$ , which is given by:

$$n_1 \cdot \sin(\theta_1) = n_2 \cdot \sin(\theta_2) \quad (1)$$

where  $n_1$  and  $n_2$  are the indices of refraction of the first and second media, respectively.

Total internal reflection occurs when  $n_1 > n_2$  and  $\theta_1$  is sufficiently large. Extracting  $\sin(\theta_2)$  from equation (1), results in:

$$\sin(\theta_2) = (n_1/n_2) \cdot \sin(\theta_1) \quad (2)$$

If  $\sin(\theta_1) > (n_2/n_1)$ , then  $((n_1/n_2) \cdot \sin(\theta_1)) > 1$  and there is no solution for  $\theta_2$ . In this case, no light will pass the interface and 100% of the input light will be reflected back into the first medium.

Glan type polarizers use the above effect in the following way: A prism  $P_1$  is made of a birefringent crystal, and is oriented with respect to an input light beam such that the preferred axis of the crystal (its optical axis) is parallel to the direction  $D_1$  of propagation of the input beam. Ordinary and extraordinary rays  $R_o$  and  $R_e$  of the input beam experiences different indices of refraction  $n_o$  and  $n_e$  of the birefringent crystal. For a light beam impinging onto the input surface of

the prism with the zero angle of incidence, none of the ordinary and extraordinary rays is refracted at the input surface of the prism. Inside the prism, these rays are incident on a tilted output surface (surface  $S_1$ ) of the prism. If an angle between the tilted interface  $S_1$  and the direction of incident beam propagation (which defines the angle of incidence  $\theta$  of the input beam onto the surface  $S_1$  and which is defined by the cut angle  $\theta'$  of the prism) is chosen such that only one of the rays (e.g.,  $R_e$ ) is reflected by total internal reflection while the other ( $R_o$ ) passes through this interface and emerges from the prism  $P_1$ , then the required polarization effect is achieved (i.e., linearly polarized output beam  $R_o$ ). In order to direct the output beam in the original direction  $D_1$  of the input beam and avoid spectral dispersion, a second prism  $P_2$  is used.

Considering  $n_2$  is a refractive index of the medium between the two prisms (air in the Glan-Taylor type polarizer and optical glue in the Glan-Thompson polarizer), the polarization effect can be achieved when the condition  $\sin(\theta) > (n_2/n_o)$  is satisfied for the ordinary ray only (assuming  $n_e < n_o$ ). Hence, the following condition is typically taken into account when designing a polarizer:

$$1/n_o < \sin(\theta)/n_2 < 1/n_e \quad (3)$$

which is typically adjusted by solely varying the value of the cut angle  $\theta'$ .

## SUMMARY OF THE INVENTION

There is a need in the art to facilitate polarization effect within a broad spectral range (from DUV up to IR) with a single polarizer assembly. Various applications require high transmission and high extinction ratio of the polarizer assembly over the whole spectral range at the same time.

Glan-Taylor polarizer has a limited angular field when used for broad spectral band, because the refractive index of air is constant, while the indices of refraction  $n_e$  and  $n_o$  of the prism depend on wavelengths of the input light (i.e., have certain dispersion profiles). As a result, the operation of this polarizer is limited by the value of angle  $\theta'$ . As for Glan-Thompson polarizer, its operation depends critically on the properties of the glue between the two prisms, therefore

the operation of this polarizers is limited by a specific, practically narrow, usually visual only or DUV spectral range. For example, WELD-ON 3 commercially available from IPS Corporation and NOA 61, commercially available from Norland Products Inc. provide for operating in a visual spectral  
5 range.

The present invention solves the above problem by providing a polarizer configuration generally similar to the Glan-Thompson polarizer (i.e., optical glue between two crystal prisms), where such parameters as a material of the polarizer prisms, the prisms' configuration (the so-called "cut angle" of the prism), and a  
10 glue material, are selected so as to ensure total internal reflection of one of the ordinary and extraordinary beam components of input light for the broadband input light, namely from DUV spectral range (from 190nm) to IR spectral range (to 950nm).

The prisms are made of a birefringent material and are configured such  
15 that the preferred axis of the prism material forms a predetermined angle (cut angle of the prism) with the tilted surface of the prism by which it is coupled to the other prism.

The glue material is selected so as to be characterized by a dispersion profile (its refraction index  $n_g$  as a function of wavelength) matching that of the  
20 polarizer prisms' material (crystal) for extraordinary and ordinary rays (refraction indices  $n_e$  and  $n_o$  as functions of wavelength) in the broadband spectral range. The selected glue composition has to be stable over time when exposed to variations in environmental conditions (temperature variations, UV radiation, etc.).

25 An additional potential problem when designing the polarizer is associated with absorption/scattering properties of the glue. To this end, the glue layer is to be desirably thin. The minimal possible thickness of the glue layer is determined by the effective "skin-depth" inside the glue, which is defined by the refractive index of the glue and the refractive index of the polarizer prisms' material for the  
30 selected one of the ordinary or extraordinary beam component which is to be



passed through (refracted by) the entire polarizer. Preferably, in order to desirably minimize the thickness of the glue layer (a thickness of a few microns, e.g., 5-10 microns) while maintaining the uniformity of the layer thickness, the present invention utilizes mixing the glue material with small solid transparent particles (beads), made for example from glass or plastic. The number of the beads in the glue layer is defined by the requirement to minimize the glue layer absorption of DUV radiation. These small beads (with the diameter of about 5-10 microns) should preferably be distributed within the surface area of the glue layer with the area concentration  $C_s$  not exceeding  $10^{-6}\text{cm}^{-2}$ , and thus the volume concentration,  $C_v$ , of the beads in the glue is to be lower than  $10^{-9}\text{cm}^{-3}$ .

Considering the polarizer prisms are  $\alpha$ -BBO crystals, the preferred glue material is a Silicon RTV transparent to electromagnetic radiation ranging from 190nm to 800nm. Such glue may be of the type CV15-2500, commercially available from NuSil Technology, USA. This glue material has a 1.41 refractive index in visual spectral range, and a  $50\mu\text{m}$  layer of the glue has about 95% transparency.

Preferably, in order to minimize the footprint of the polarizer while not affecting its operation, the side facets of the polarizer (light input and output facets) are of circular geometry or a polygon of more than four angles (e.g., eight-angle polygon):

There is thus provided according to one broad aspect of the present invention, a polarizer device comprising:

- first and second prisms made of a birefringent material having certain dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  for, respectively ordinary and extraordinary polarization components of an input light beam, the first and second prisms being coupled to each other by tilted surfaces of the prisms, each of the first and second prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and

extraordinary polarization components of the input light beam within a spectral range of about 190nm-950nm, which impinges onto the prism substantially along the preferred axis of said prism;

- a binding material layer between the tilted surfaces of the first and  
5 second prisms, said binding material being selected so as to be substantially transparent for the spectral range of about 190nm-950nm and to have a dispersion profile,  $n_g(\lambda)$ , matching the dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism in the entire spectral range.

According to another broad aspect of the present invention, there is  
10 provided a polarizer device comprising:

- first and second prisms made of a birefringent material having certain dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  for, respectively ordinary and extraordinary polarization components of an input light beam, the first and second prisms being coupled to each other by tilted surfaces of the prisms, each of the first and second  
15 prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a spectral  
20 range of about 190nm-950nm, which impinges onto the prism substantially along the preferred axis of said prism;

- a binding material layer between the tilted surfaces of the first and second prisms, the binding material layer being substantially transparent for the spectral range of about 190nm-950nm, and including a mixture of a binding  
25 material and small beads of a solid transparent material, the binding material having a dispersion profile,  $n_g(\lambda)$ , matching the dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism in the entire said spectral range.

According to yet another aspect of the present invention, there is provided a polarizer device comprising:

- first and second prisms made of a birefringent material having certain dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  for, respectively ordinary and extraordinary polarization components of an input light beam, the first and second prisms being coupled to each other by tilted surfaces of the prisms, each of the first and second  
5 prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a spectral  
10 range of about 190nm-950nm, which impinges onto the prism substantially along the preferred axis of said prism;

- a binding material layer between the tilted surfaces of the first and second prisms, the binding material layer being substantially transparent for the spectral range of about 190nm-950nm, and including a mixture of a binding  
15 material and small beads of a solid transparent material, the binding material having a dispersion profile,  $n_g(\lambda)$ , matching the dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism in said spectral range, the beads being substantially uniformly distributed within the binding material layer with a surface area concentration,  $C_s$ , substantially not exceeding  $10^{-6} \text{ cm}^{-2}$ .

20 According to yet another broad aspect of the present invention, there is provided a polarizer device comprising:

- first and second prisms coupled to each other by their tilted surfaces, each of the first and second prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said  
25 prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a predetermined spectral range of the input beam, which impinges onto the prism substantially along the preferred axis of said prism;

- a binding material layer between the tilted surfaces of the first and second prisms, the binding material layer being substantially transparent for the predetermined spectral range and having a dispersion profile,  $n_g(\lambda)$ , matching dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism for, respectively, ordinary and extraordinary polarization components.

According to yet another aspect of the invention, there is provided a polarizer device comprising:

- first and second prisms coupled to each other by their tilted surfaces; and
- a binding material layer between said tilted surfaces of the prisms, said layer including a mixture of a binding transparent material and small beads of a solid transparent material, the binding material layer thereby having a substantially uniform thickness of about 5-10 microns.

According to yet another aspect of the present invention, there is provided a polarizer device having opposite side facets serving for, respectively, inputting and outputting light, wherein each of said side facets is either a circle or a polygon of more than four angles.

## BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, a preferred embodiment will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

**Figs. 1A and 1B** show the configuration and operational principles of a conventional double-prism polarizer;

**Fig. 2** illustrates a polarizer device of the present invention;

**Figs. 3A to 3C** graphically illustrate the principles of the present invention for designing an  $\alpha$ -BBO polarizer device, wherein **Fig. 3A** shows the total reflection angle of the prism as a function of wavelength of input light for 1.4 refractive index of a glue layer between two  $\alpha$ -BBO crystal prisms, **Fig. 3B** shows the dispersion profile of the glue layer, and **Fig. 3C** shows the optimal conditions for the polarizer configuration;

**Fig. 4** shows the minimal and maximal dispersion profiles for a glue material suitable to be used in a polarizer device with the cut angle of  $30.4^\circ$ , and the dispersion profile of a specific glue material available in the market;

**Fig. 5** illustrates yet another principle of the invention for designing a polarizer device, showing a skin-depth in glue layer versus wavelength of input light;

**Fig. 6** illustrates another example of a polarizer device of the present invention; and

**Figs. 7A-7D** illustrate yet another advantageous feature of the present invention, wherein Figs 7A-7B show the typical shape of the convention polarizer, and Figs. 7C-7D show that of the polarizer of the present invention aimed at minimizing the footprint of the polarizer while not affecting its operation.

## DETAILED DESCRIPTION OF THE INVENTION

**Figs. 1A and 1B** illustrate the configuration and operation principles of a conventional polarizer device of Glan-Tailor type (two prisms mechanically coupled to each other with an air gap between them) or Glan-Thomson type (two prisms glued to each other).

The present invention provides for a novel polarizer device suitable to be used for extracting either one of ordinary or extraordinary polarization component of input light within a broadband spectral range of the input light, i.e., from DUV (190nm) to IR (950nm).

Referring to **Fig. 2**, there is schematically illustrated a polarizer device **10** of the present invention. The device **10** is formed by two prisms  $P_1$  and  $P_2$  attached to each other by an optical glue layer **12** between the tilted surfaces of  $S_1$  and  $S_2$  of the prisms  $P_1$  and  $P_2$ , respectively. In this device, the following parameters are appropriately selected to ensure the device operation for light within the spectral range of about 190nm-950nm: cut angle  $\theta'$  of the prism; and the properties of the glue material layer **12**.

The prisms  $P_1$  and  $P_2$  are made of a birefringent material that is transparent for the required broadband spectral range, and is preferably  $\alpha$ -BBO or quartz. The prisms are configured such that the preferred axis  $PA$  of the prism material forms a predetermined angle  $\theta'$  (cut angle) with the tilted surface  $S_1$  of the prism  $P_1$  by which it is coupled to the other prism  $P_2$ . The glue material for the layer 12 is selected so as to be characterized by a dispersion profile  $n_g(\lambda)$  matching the dispersion profiles  $n_e(\lambda)$  and  $n_o(\lambda)$  of the prism material for, respectively, extraordinary and ordinary rays  $R_o$  and  $R_e$  in the required spectral range. Moreover, the glue material is selected to be stable over time when exposed to variations in environmental conditions (temperature variations, UV radiation, etc.). For  $\alpha$ -BBO crystal prisms, the preferred glue material is a Silicon RTV transparent to electromagnetic radiation ranging from 190nm to 800nm. Such glue may be CV15-2500, commercially available from NuSil Technology, USA (a 50 $\mu$ m layer of this glue has about 95% transparency).

Reference is now made to Figs. 3A-3C illustrating the principles of the present invention for designing an  $\alpha$ -BBO polarizer device.

Let us assume that the refractive index of the glue is constant over all wavelength (i.e., the glue material has no dispersion), for example is about 1.4. Fig. 3A shows the total reflection angles  $\theta_o$  and  $\theta_e$  for the ordinary and extraordinary polarization components of the input beam in the prism as functions of wavelength of the input beam for 1.4 refractive index glue layer between two  $\alpha$ -BBO crystal prisms. For the proper operation of a polarizer device, the angle of incidence  $\theta$  of the input beam with respect to the tilted surface  $S_1$  of the prism  $P_1$  must be between the curves  $\theta_o(\lambda)$  or  $\theta_e(\lambda)$  of the total internal reflection for ordinary and extraordinary rays of this input beam. To this end, a finite conjugate situation is to be considered and the fact that the input beam has a certain beam divergence. In other words, the angle of incidence  $\theta$  of the input beam, namely, the cut angle of the prism (considering that the prism when in use is oriented such that the beam impinges onto the prism along its

optical axis) should be selected such that enough margins  $M_1$  and  $M_2$  are provided between the angle  $\theta$  and angles  $\theta_o$  or  $\theta_e$  within the required spectral range for the device operation. As can be seen in Fig. 3A, a certain problem might be in a spectral range below 230nm and also at the upper spectral range  
5 slightly above 1000nm. For  $\alpha$ -BBO polarizer device with 1.4 refractive index glue layer, the optimal angle of incidence  $\theta$  is about 59-60° (preferably 59.6°), the cut angle being  $\theta'=(90-\theta)$ .

While selecting glue material having an optimal dispersion profile, as shown in Fig. 3B, the cut angle of the prism, and accordingly the angle of  
10 incidence  $\theta$ , would match the TIR conditions of the ordinary and extraordinary rays,  $\theta_o(\lambda)$  or  $\theta_e(\lambda)$ , as shown in Fig. 3C.

Generally speaking, the glue material should be selected such that its dispersion profiles for ordinary and extraordinary rays  $n^{(g)}_o(\lambda)$  or  $n^{(g)}_e(\lambda)$  match the dispersion profiles of the prism material,  $n^{(p)}_o(\lambda)$  or  $n^{(p)}_e(\lambda)$ . Fig. 4 shows the  
15 minimal and maximal dispersion profiles  $G_1$  ( $n^{(g)}_o(\lambda)$ ) and  $G_2$  ( $n^{(g)}_e(\lambda)$ ), respectively, for a glue material suitable to be used in a polarizer device with the cut angle  $\theta'=30.4^\circ$  ( $\theta'=90-59.6^\circ$ ). The inventors have found that CV15-2500, commercially available from NuSil Technology, USA has the dispersion profile (graph  $G_3$ ) satisfying this requirement.

20 Furthermore, the glue layer should preferably be sufficiently thin (a few microns, e.g., 5-10 microns) to avoid undesirable light absorption in the glue (which is essential for DUV spectral range). The minimal possible thickness of the glue layer is determined by the effective "skin-depth" inside the glue, which is defined by the refractive index of the glue and the refractive index of the  
25 polarizer prisms' material for the selected one of the ordinary or extraordinary beam component which is to be passed through (refracted by) the entire polarizer. In other words, the glue layer should not be too thin to avoid "tunneling".

With the refractive index of ordinary ray for  $\alpha$ -BBO being  $n_{ord}$  and that of  
30 the glue being  $n_{glue}$ , and the incidence angle  $\theta=59.5^\circ$ , the rate of decay of light

inside the glue can be estimated as follows. The lateral component of the k-vector at the crystal (which must also be inside the glue) is:

$$k_x = n_{ord} k_0 \sin \theta_{inc}$$

5        The total k-vector length inside the glue is  $n_{glue} k_0$ , therefore the component of the vector inside the glue which is normal to the plane must be:

$$\begin{aligned} k_{z,glue} &= k_0 \sqrt{n_{glue}^2 - n_{ord}^2 \sin^2 \theta_{inc}} \\ &= -jk_0 \sqrt{n_{ord}^2 \sin^2 \theta_{inc} - n_{glue}^2} \end{aligned}$$

10       Since the field inside the glue depends on z (axis normal to the plane of beam propagation) according to

$$\exp(jk_z z) = \exp\left(-k_0 z \sqrt{n_{ord}^2 \sin^2 \theta_{inc} - n_{glue}^2}\right) = \exp(-z / \delta)$$

15       the effective "skin-depth"  $\delta$  inside the glue is:

$$\delta = \frac{1}{k_0 \sqrt{n_{ord}^2 \sin^2 \theta_{inc} - n_{glue}^2}}$$

20       **Fig. 5** illustrates a plot of this skin-depth versus wavelength: For a proper operation, actual glue thickness should be about 10 times this value  $\delta$ , giving for entire range of wavelengths up to 950nm a minimum thickness of about 6 microns. This parameter depends on the maximal wavelength of the required spectral range.

The glue layer should thus be desirable thin and with the uniform thickness along the layer.

25       **Fig. 6** exemplifies a polarizer device **100** in which the uniformly thin glue layer **112** is obtained by mixing a glue material (selected as described above) with small solid transparent particles (beads) **114**, made for example from glass or plastic. The concentration of the beads **114** in the glue layer **112** is defined by



the requirement to minimize the glue layer absorption of DUV radiation. The small beads (with the diameter of about 5-10 microns) are preferably distributed within the surface area of the glue layer with the area concentration  $C_s$  not exceeding  $10^{-6}\text{cm}^{-2}$ , and thus the volume concentration,  $C_v$ , of the beads in the glue is lower than  $10^{-9}\text{cm}^{-3}$ . Such concentration enables negligible effect of particles on the polarizer performance.

It is often the case that an optical system should be of as small footprint as possible (for example in integrated metrology/inspection tools). The present invention provides for solving this problem by designing a polarizer with its side facets (input and output facets) as a circle or polygon of more than four angles, rather than a typically used rectangle. This is illustrated in **Figs. 7A-7D**.

**Fig. 7A** shows a typical shape of a polarizer device having rectangular input and output facets  $F_1$  and  $F_2$ . As shown in **Fig. 7B**, the dimensions of this facet  $F_1$  (and  $F_2$ ) define the maximal spot size diameter of the output beam and the minimal footprint of this polarizer.

**Figs. 7C and 7D** illustrate a polarizer device **200** of the present invention. The device **200** has side facets  $F'_1$  and  $F'_2$  in the form of a polygon with more than 4 angles — eight-angle polygon in the present example. It should be understood that the best case would be a circular geometry of the side facets, but this is more difficult to implement. As can be seen from **Fig. 7D**, this polarizer is characterized by smaller footprint for the same spot size of the output beam, as compare to that of **Figs. 7A-7B**.

Those skilled in the art will readily appreciate that various modifications and changes can be applied to the embodiments of the invention as hereinbefore exemplified without departing from its scope defined in and by the appended claims.

**CLAIMS:**

1. A polarizer device comprising:
  - first and second prisms made of a birefringent material having certain dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  for, respectively ordinary and extraordinary polarization components of an input light beam, the first and second prisms being coupled to each other by tilted surfaces of the prisms, each of the first and second prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a spectral range of about 190nm-950nm, which impinges onto the prism substantially along the preferred axis of said prism;
  - a binding material layer between the tilted surfaces of the first and second prisms, said binding material being selected so as to be substantially transparent for the spectral range of about 190nm-950nm and to have a dispersion profile,  $n_g(\lambda)$ , matching the dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism in the entire spectral range.
2. The device of Claim 1, wherein said prisms are  $\alpha$ -BBO crystals, said predetermined angle is about 30-31°, thereby providing an angle of incidence of the input light onto the tilted surface of the first prism of about 59-60°.
3. The device of Claim 1 or 2, wherein said binding material is a silicon RTV.
4. The device of Claim 3, wherein said binding material is CV15-2500 optical glue, commercially available from NuSil Technology, USA.
5. The device of any one of preceding Claims, wherein said binding material layer has a thickness of a few microns.
6. The device of any one of preceding Claims, wherein said binding material layer is a mixture of an optical glue material with small beads of solid transparent material.

7. The device of Claim 6, wherein said beads are uniformly distributed within the glue material with a surface area concentration of the beads substantially not exceeding  $10^{-6}\text{cm}^{-2}$ .
8. The device of any one of preceding Claims, wherein each of the prisms' facets defining side facets of the device for inputting and outputting light has a circular geometry.
9. The device of any one of preceding Claims, wherein each of the prisms' facets defining side facets of the device for inputting and outputting light is a polygon of more than four angles.
- 10 10. The device of any one of preceding Claims, wherein each of the prisms' facets defining side facets of the device for inputting and outputting light is an eight-angle polygon.
11. A polarizer device comprising:
- first and second prisms made of a birefringent material having certain dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  for, respectively ordinary and extraordinary polarization components of an input light beam, the first and second prisms being coupled to each other by tilted surfaces of the prisms, each of the first and second prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a spectral range of about 190nm-950nm, which impinges onto the prism substantially along the preferred axis of said prism;
  - 25 - a binding material layer between the tilted surfaces of the first and second prisms, the binding material layer being substantially transparent for the spectral range of about 190nm-950nm, and including a mixture of a binding material and small beads of a solid transparent material, the binding material having a dispersion profile,  $n_g(\lambda)$ , matching the dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism in the entire said spectral range.
- 30

12. A polarizer device comprising:

- first and second prisms made of a birefringent material having certain dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  for, respectively ordinary and extraordinary polarization components of an input light beam, the first and second prisms being  
5 coupled to each other by tilted surfaces of the prisms, each of the first and second prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and  
10 extraordinary polarization components of the input light beam within a spectral range of about 190nm-950nm, which impinges onto the prism substantially along the preferred axis of said prism;

- a binding material layer between the tilted surfaces of the first and second prisms, the binding material layer being substantially transparent for the  
15 spectral range of about 190nm-950nm, and including a mixture of a binding material and small beads of a solid transparent material, the binding material having a dispersion profile,  $n_g(\lambda)$ , matching the dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism in said spectral range, the beads being substantially uniformly distributed within the binding material layer with a  
20 surface area concentration,  $C_s$ , substantially not exceeding  $10^{-6}\text{cm}^{-2}$ .

13. A polarizer device comprising:

- first and second prisms coupled to each other by their tilted surfaces, each of the first and second prisms being configured such that the preferred axis of the prism material forms a predetermined angle with the tilted surface of said  
25 prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a predetermined spectral range of the input beam, which impinges onto the prism substantially along the preferred axis of said prism;

- a binding material layer between the tilted surfaces of the first and second prisms, the binding material layer being substantially transparent for the predetermined spectral range and having a dispersion profile,  $n_g(\lambda)$ , matching dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism for, respectively, ordinary and extraordinary polarization components.

14. A polarizer device comprising:

first and second prisms coupled to each other by their tilted surfaces; and a binding material layer between said tilted surfaces of the prisms, said layer including a mixture of a binding transparent material and small beads of a solid transparent material, the binding material layer thereby having a substantially uniform thickness of about 5-10 microns.

15. A polarizer device having opposite side facets serving for, respectively, inputting and outputting light, wherein each of said side facets is either a circle or a polygon of more than four angles.

16. A method for manufacturing a polarizer device, the method characterized by at least one of the following:

(i) providing first and second prisms made of a selected birefringent material having certain dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  for, respectively ordinary and extraordinary polarization components of an input light beam, each of the first and second prisms being configured such that the preferred axis of the prism material forms a predetermined angle with a tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a spectral range of about 190nm-950nm, which impinges onto the prism substantially along the preferred axis of said prism; and attaching the tilted surfaces of the prisms to each other by a binding material layer selected so as to be substantially transparent for the spectral range of about 190nm-950nm and to have a dispersion profile,  $n_g(\lambda)$ , matching the

dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism in the entire spectral range;

- 5 (ii) providing first and second prisms each being configured such that the preferred axis of the prism material forms a predetermined angle with a tilted surface of said prism, said predetermined angle being selected for the given material of the prisms so as to provide an effect of total internal reflection for a selected one of the ordinary and extraordinary polarization components of the input light beam within a predetermined spectral range of the input beam, which impinges onto the prism substantially along the preferred axis of said prism; attaching the tilted surfaces of the first and second prisms to each other by a binding material layer substantially transparent for the predetermined spectral range and having a dispersion profile,  $n_g(\lambda)$ , matching dispersion profiles  $n_o(\lambda)$  and  $n_e(\lambda)$  of the birefringent material of the prism for, respectively, ordinary and extraordinary polarization components.
- 10
- 15 (iii) providing first and second prisms coupled to each other at their tilted surfaces by a binding material layer, which includes a mixture of a binding transparent material and small beads of a solid transparent material, the binding material layer thereby having a substantially uniform thickness of about 5-10 microns.
- 20 (iv) configuring opposite side facets serving for, respectively, inputting and outputting light, to be either a circle or a polygon of more than four angles, thereby minimizing a footprint of the polarizer device.

17. A polarizer device as hereinbefore described and exemplified with reference to the accompanying drawings.

18. A method for manufacturing a polarizer device as hereinbefore described.

For the Applicants,

**REINHOLD COHN AND PARTNERS**

By: 

Fig. 1A  
(general art)

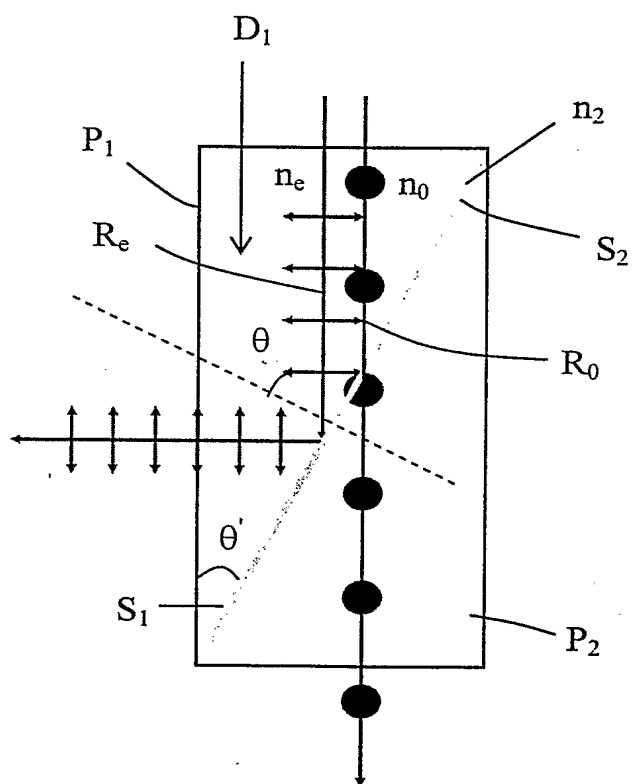
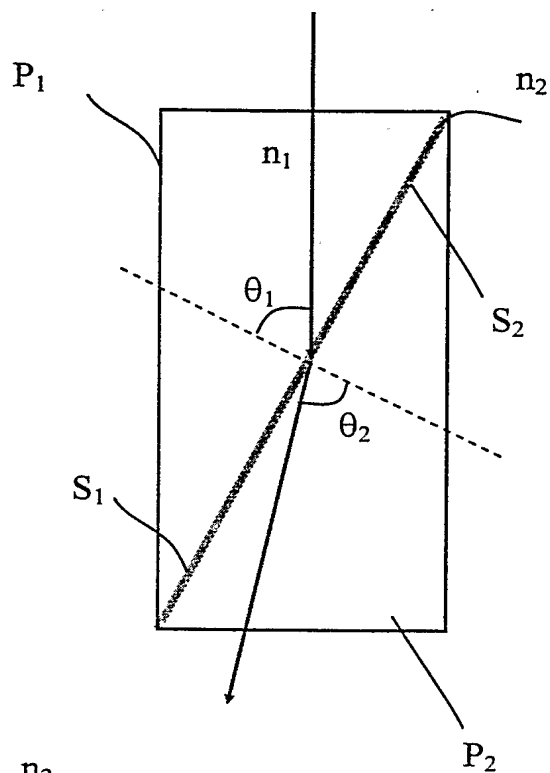


Fig. 1B  
(general art)

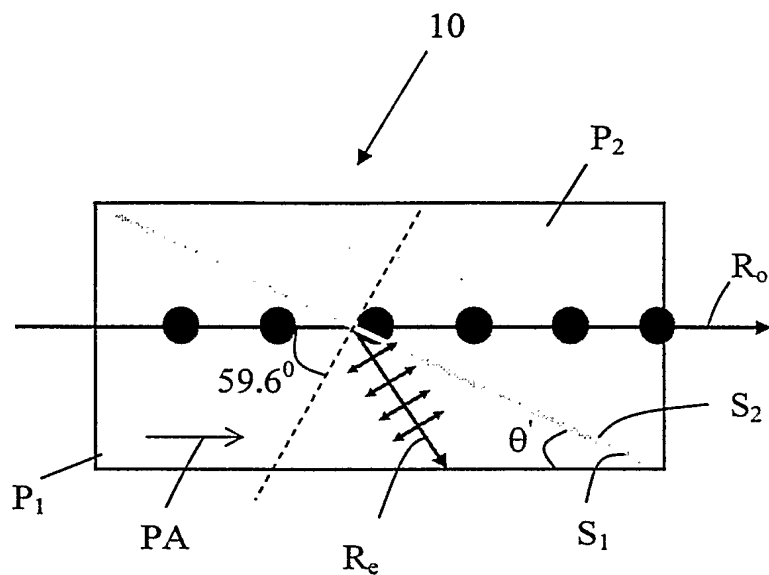


Fig. 2

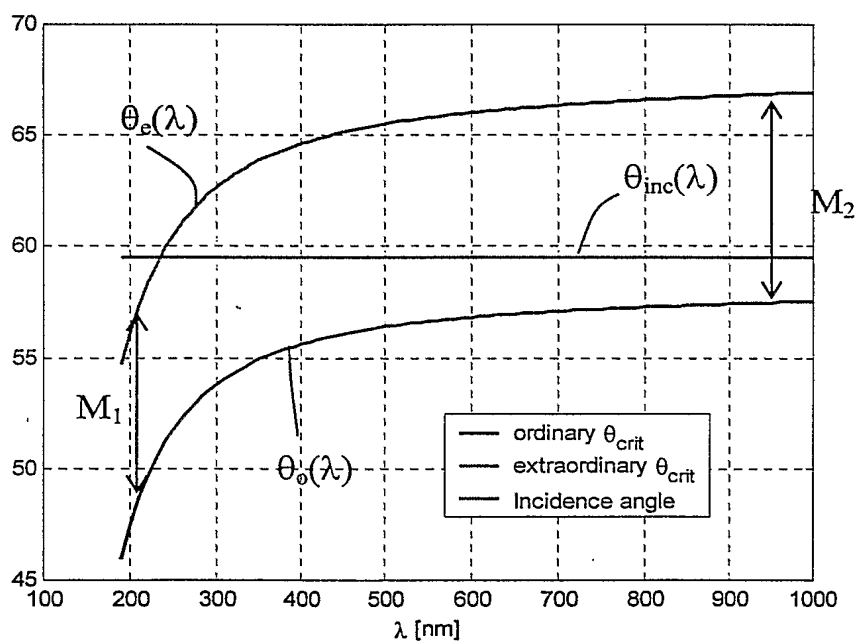


Fig. 3A



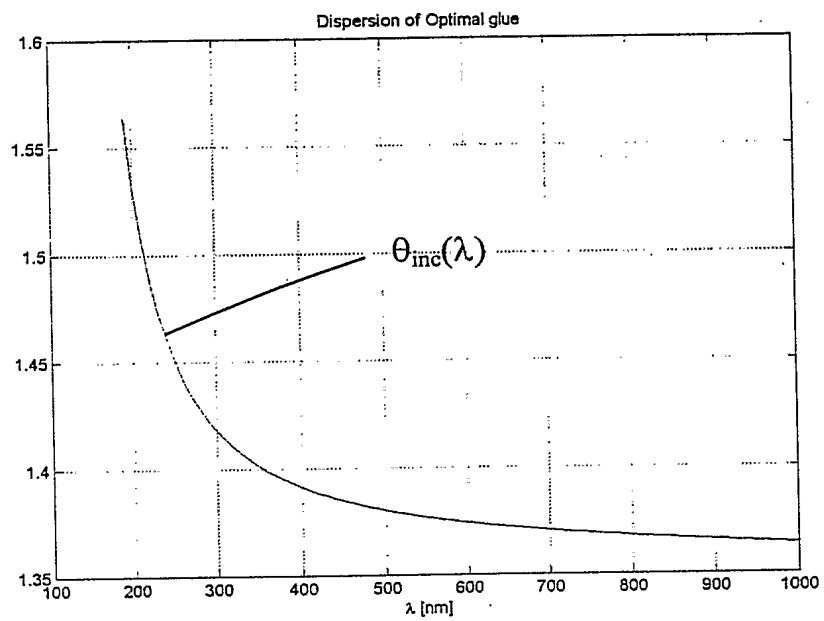


Fig. 3B

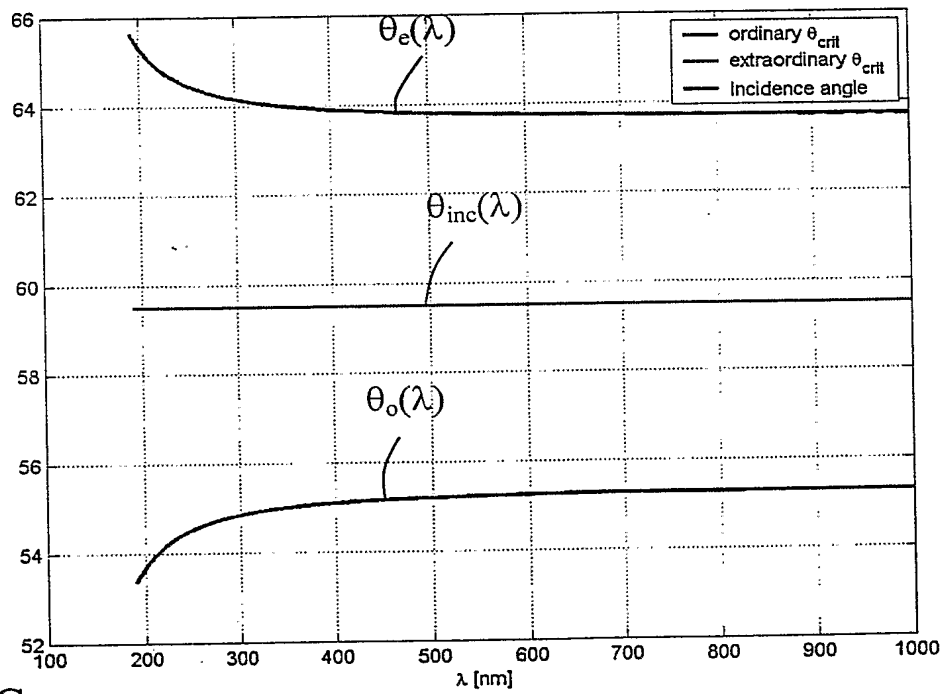


Fig. 3C

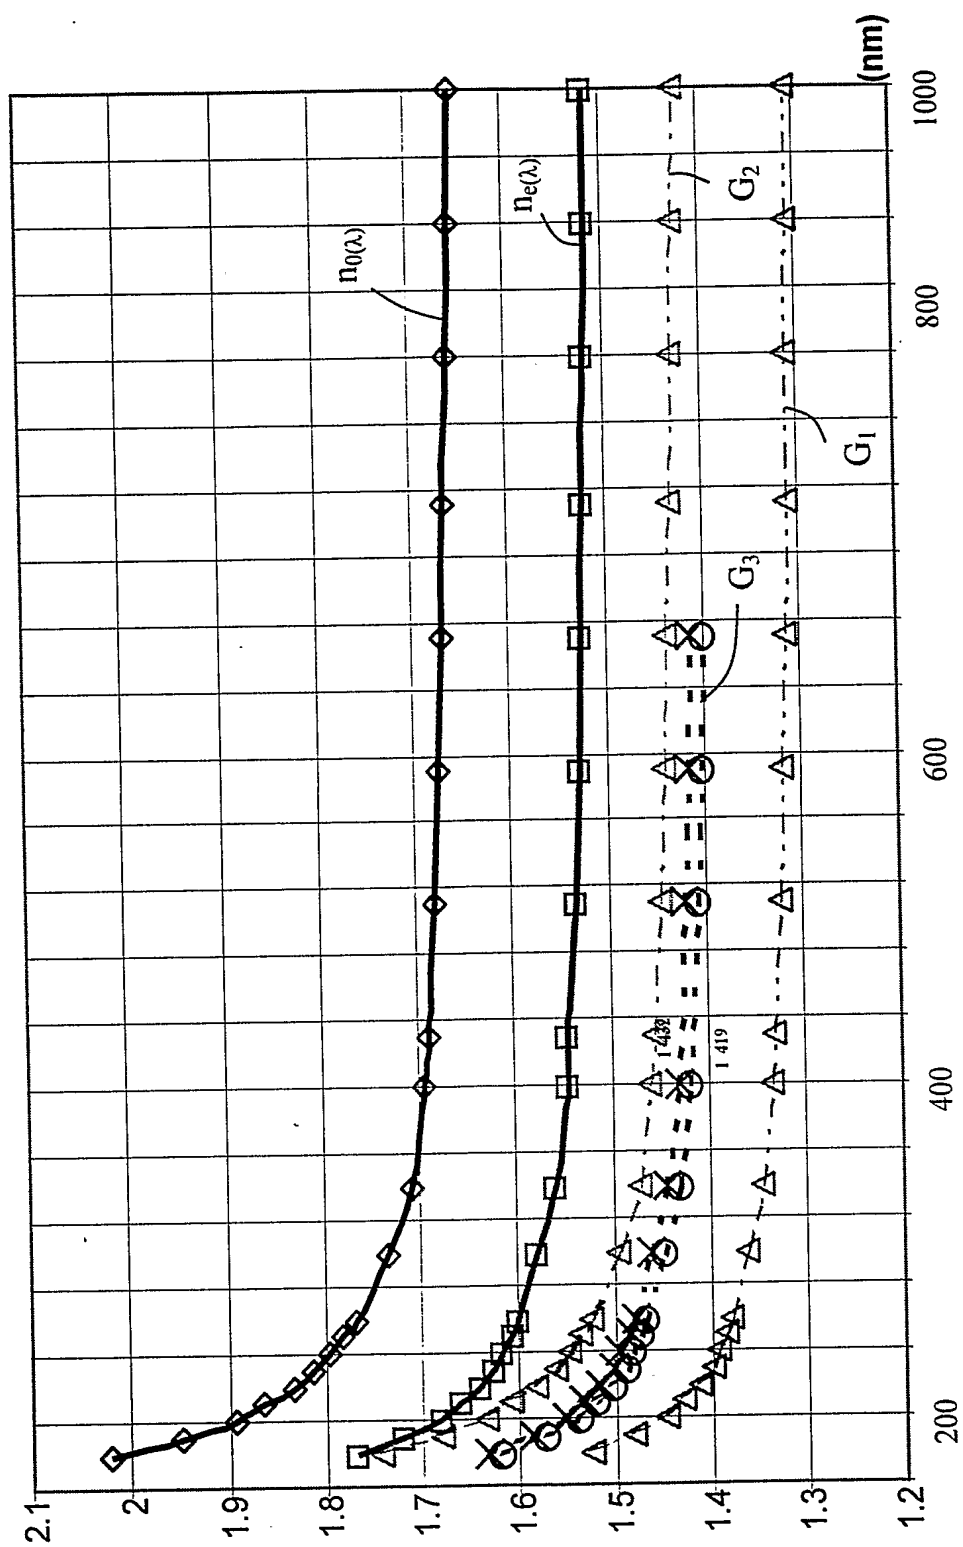


Fig. 4

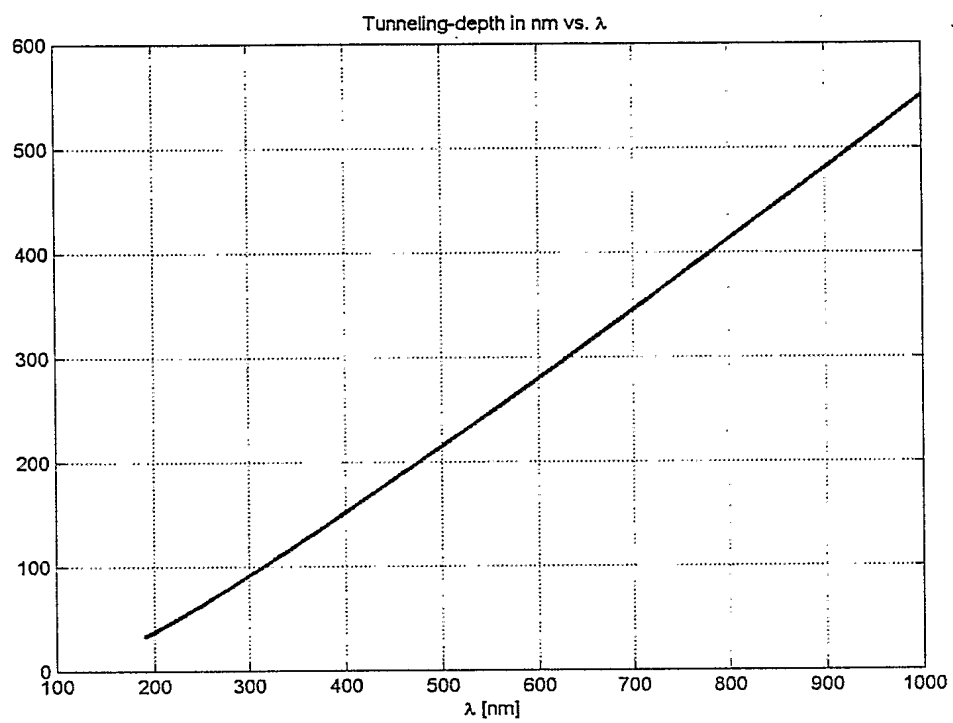


Fig. 5

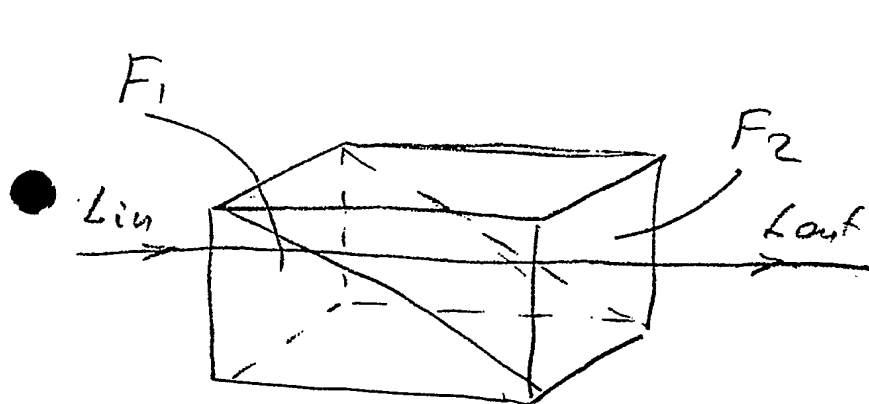


Fig. 7A  
(general art)

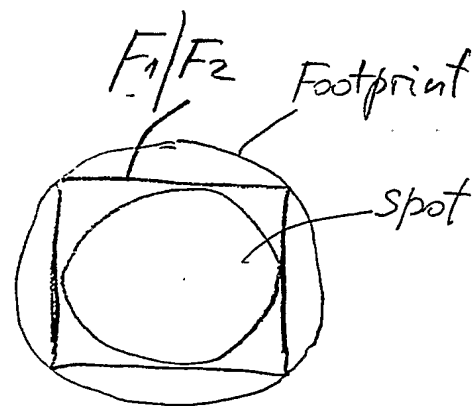


Fig. 7B  
(general art)

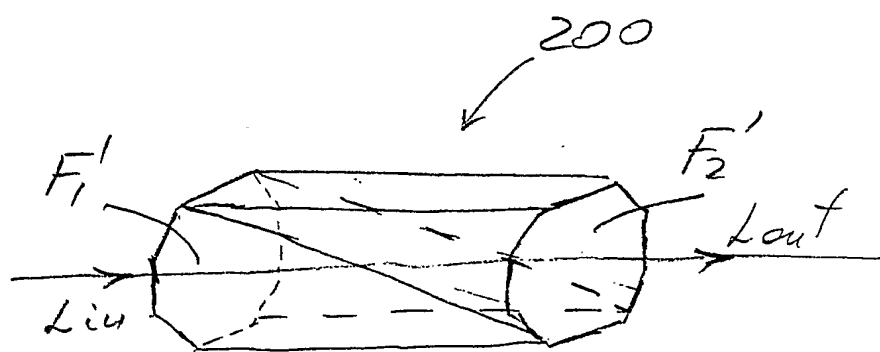


Fig. 7C

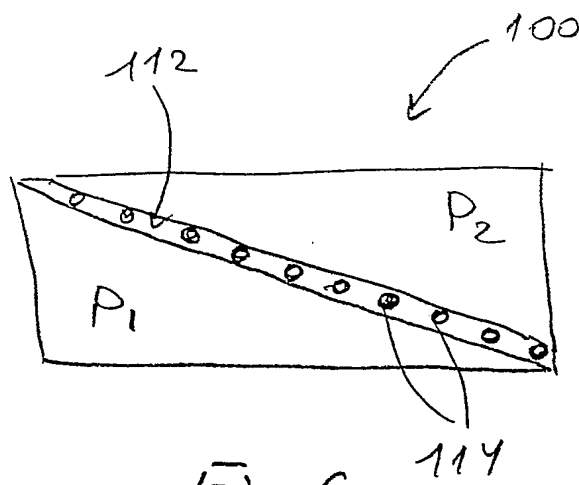
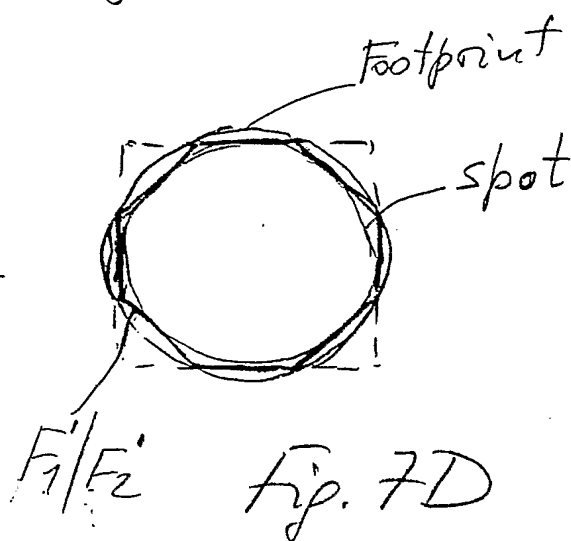


Fig. 6